

Professional Front/Rear Mounted Flail Mower

Designed for heavy duty mowing operation

- Cuts long wet grass effectively
- Attach and detach in seconds
- Front or rear mounting with simple double sided linkage mountings and gearbox
- Quiet in operation
- Even spread of grass cuttings
- Excellent ground following characteristics
- Easy to set and operate
- Strong chassis with tubular constructed 'A' frame and integral protection guards for belt drive and rotor bearings.
- Heavy duty gearbox with solid output shaft, oil cooling and lubrication of bearings for trouble free operation.



P1800 front mounted



P1800 in action

Front/Rear mounted flail mower

- 1.2m/1.4m/1.6m/1.8m cutting widths
- 4mm back to back flails, 5mm cast back to back, paddle (fine finish) and scarifying blade options
- Full width, height adjustable rear roller and front castor wheels
- Fixed and fully floating linkage mounts
- Triple 'V' belt drive to rotor
- Cat 1 3 point hitch for front or rear

Flexibility and durability

The Professional range offers a robust frame and rotor combination with a range of flail options. They can operate in most conditions, both long and overgrown grass and light scrub (up to 35mm thick) to fine finish lawns leaving a smart rolled finish. The heavy duty transmission with oil immersed cross shaft and remote greasing points allows for easy maintenance and a long trouble free working life. The optional front mounted castor wheels give accurate cutting height control and reduce the possibility of scalping. The overrun clutch PTO shaft, also optional, protects both mower and tractor when the tractor is fitted with independent PTO drive.



P1800 with hydraulic offset

Specifications

Model	Width of cut mm	Weight kg	No. of Y flails (in pairs)	No. of paddle flails/scarifying blades	Min. tractor hp	Adjustable front castors	Hydraulic offset	Overrun clutch on PTO
P1200	1200	210	76	38	18	O	O	O
P1400	1400	225	88	44	22	O	O	O
P1600	1600	280	96	48	25	O	O	O
P1800	1800	290	116	58	30	O	O	O

O = Optional

Standard specification includes


4mm back to back Y flails
Adjustable rear roller with scraper
540rpm PTO shaft
1000rpm PTO shaft

Optional

Flail options

Flail options are, from left to right;

- Y flail fitted as standard
- Y flail with scarifying blade
- Scarifying blade alone
- Paddle flail for high quality lawn mowing
- Paddle flail with scarifying blade
- Cast delta flail for heavy duty work with a high quality finish

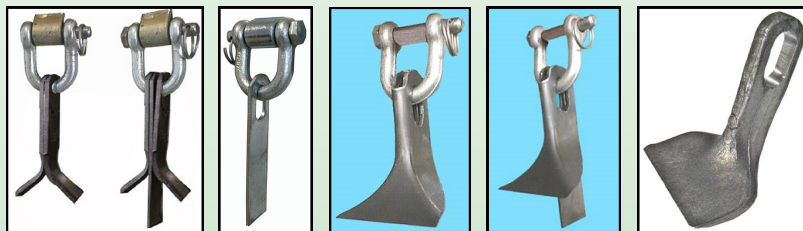

P1800 with front castors