

# Rubber scrapers



## Robuut

*Produced from high-quality and robust steel.*

## Fully galvanized

*The frame is completely galvanized and therefore has a corrosion-resistant future.*

## Modular

*The rubbermat is replacable and options (incl. attachments) are modularly applicable.*

# Rubber scrapers

By means of their robust frame with thick, sturdy canvas rubber, the ZOCON rubber scrapers can easily displace forage, manure, mud or snow. The machine can be attached by means of a three point linkage (forklift input included) on the front or rear of the tractor, or be attached to wheel loaders with the wheel loader linkage and attachments. The rubber mats are developed of strong rubber that wears out slowly. With options, the rubber scrapers can be equipped with a movable pivot point, which always includes adjustable edges. Additionally, the ZOCON rubbers scrape is available in multiple widths, ensuring this machine to be suitable for all types of farming companies, or other surroundings that require scraping. The scrapes can be obtained in the measurements 190, 270 and 300 centimetres.

## Technical Specifications

	RS-S190	RS-S270	RS-S300	RS-M190	RS-M270	RS-M300	RS-H190	RS-H270	RS-H300
Working width (in cm)	190	270	300	190	270	300	190	270	300
Weight (in kg)	148	173	190	213	238	255	218	243	260
Height rubber (cm)	40	40	50	40	40	50	40	40	50
Length corners (cm)	25	38	53	25	38	53	25	38	53

## Variation rubber scrapers



Rubber scrape + three point linkage



Rubber scrape + wheel loader frame

## Attachments

The rubber scrapers can be assembled with three-point linkage + forklift input. This way, the scraper can be attached to the front and the rear of the tractor, as well as a forklift (right)

The rubber scrapers can also be assembled with a universal attachment frame + attachments, allowing it to be attachable to more than 100 different wheel loaders (left).



# Rubber scrape settings



## Rubber scraper standard

The standard rubber scraper is fixed onto the blade, therefore this edition cannot be hinged from left to right. The edition does have mechanically adjustable corners.

## Rubber scraper mechanical

The mechanical rubber scraper has steel pins that can be disattached to pivot the blade from left to right (up to 60 degrees). This edition also has mechanically adjustable corners.



## Rubber scraper hydraulic

The hydraulic rubber scrapers' blade can be pivoted by means of an attachment with a hydraulic system from left to right (up to 60 degrees). A hydraulic coupling from the tractor or wheel loader is thus necessary. Also this edition has mechanically adjustable corners.

# Optional accessories



## Collision protection valve

In case the rubber scrape has a hydraulic pivot system, a collision protection valve can be applied when the tractor or wheel loader delivers more than 180 bar.



## 3-in-1 linkage

Addition of a 3-in-1 linkage (contains three point linkage, forklift input and euro linkage) making the rubber scrape available on three different attachment methods.

## Snow extension

A snow extension can be mounted on top of the rubber scrape, making it able to move large amounts of snow effectively.



## Attachments

Attachments can be ordered in addition to the rubberscraper with universal attachment frame, so it can be attached to concerning wheel loader.

ZAD-2003: Liebherr, Terex,  
Volvo, Komatsu




ZAD-2011: Manitou



ZAD-2045: Giant, Kubota,  
Eurotrac



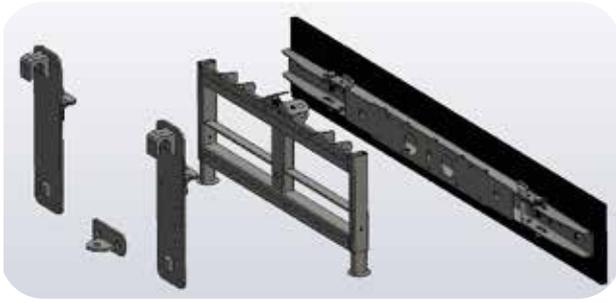

## Advantages ZOCON rubber scrapers

- **Robust and galvanized frame**  
The rubber scrapers are made from high-quality, strong steel. Moreover, the complete frame is galvanized. This allows the machine to carry out heavy tasks without problems.
- **Modular construction**  
The ZOCON rubber scrapers are constructed modularly. This means that parts and eventual options can always be ordered, added in and/or replaced in a later stage.
- **Big degree adjustment**  
The mechanic and hydraulic rubber scraper have a movable pivot point left and right of a staggering 60 degrees. Next to that, the adjustable edges can be adjusted up to 40 degrees.
- **Durable machine**  
The thick rubber mats (400mm thickness) will last long, because their high quality. In addition, after wear and tear, the mat can be flipped over. Also worn-down mats can be ordered and replaced, assuring the same machine to stay in use.

## Conclusion

The ZOCON rubber scraper is a strong, robust product that lasts long because of its modular construction and the galvanized frame. The machine is to be assembled in multiple measurements and attachments possibilities, assuring the rubber scraper to be viable in many different situations. Moreover, the way of adjusting the pivotable point can be determined, which can be adjusted left and right up to 60 degrees. In short, a suitable scraper that can defy any situation and lasts very long.



The Mill House  
East Knappton  
YO17 8JA

info@ryetec.co.uk  
01944 728186

[www.ryetec.co.uk](http://www.ryetec.co.uk)